

Repairing the Trackball of a BlackBerry 8800 www.mqs.at, October 19th, 2008


This guideline is not authorized by the manufacturer of BlackBerry – applying it is done at your own risk.



The BlackBerry 8800 (red arrow) with the piece of fluff (green arrow) that was removed out of the trackball-housing. (Blue arrow)




Tools used:
Nail clipper (orange arrow) and Fingernails.

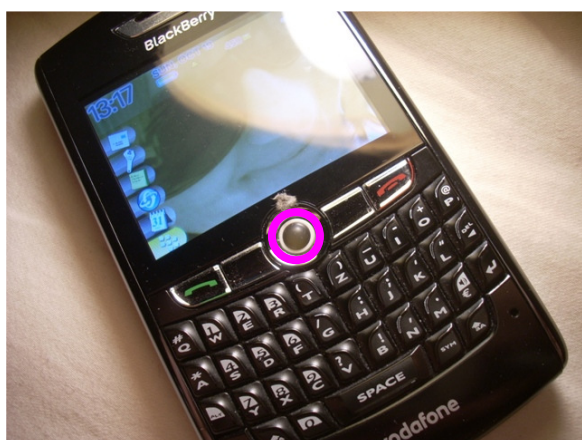

Step 1: With the tip of the nail clipper, pull trackball-housing-mounting-ring (pink ring) out.

Step 2: pull out the trackball-housing that consists of two pieces – see yellow arrows left above

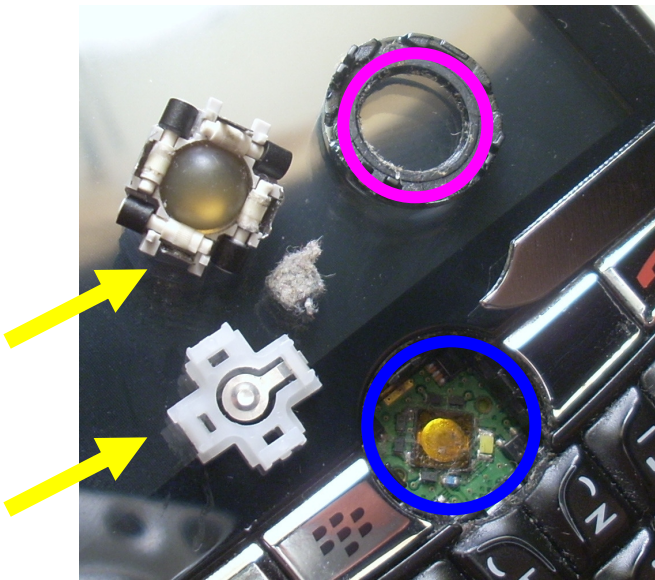

Step3: When separating the two pieces of the trackball-housing (yellow arrows left) one needs to be very gentle in bending the 4 sheet metal surfaces. And then, the fluff is already exposed.

Step 4: Reassemble the housing (yellow arrows)

Step 5: Put the housing back into „the whole“(blue ring).

Step 6: Push the part (pink ring) into the position of the blue ring.



This guideline is not authorized by the manufacturer of Blackberry – applying it is done at your own risk.



At **mqs.at** we provide services and products with **Maximum Quality** and **Speed**

If you should find Sections not clear enough or if information, you expected, was missing, please contact office@mqs.at with your feedback.

References

You can find usefull information on these sites:

[1] <http://www.blackberryforums.com/general-8100-series-discussion-pearl/63085-blackberry-trackball-cleaning-methods.html>.

[2] <http://flickr.com/photos/jaredten/sets/72157594508693488/>.